

TECHNICAL DATA SHEET: 0021005
3/8" 7x19 WIRE ROPE HDG
PN: 115-113



Application:


Recommend use with Tuf-Tug Safe Climb Systems

Operating Temp. Range: 140°F (60°C) to -40°F (-40°C)

Load Rating 14,400lbs

APPLICABLE STANDARDS:

OSHA / ANSI Z359.16 / TIA 222 / EN 353-1:2014+A1:2017 / CSA Z259.2.5

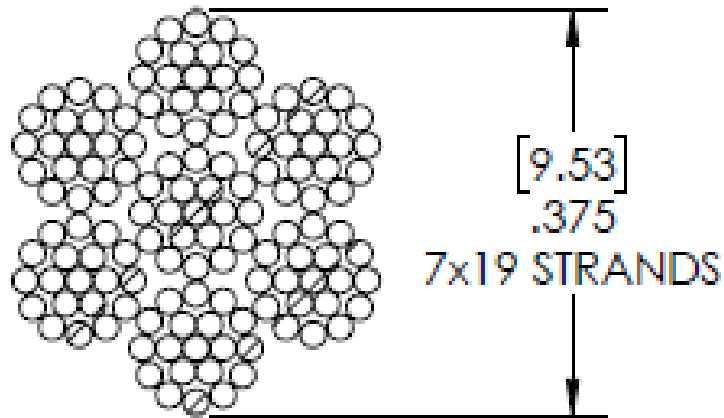

	QTY	Component	Material	Finish
1	1	3/8 7x19 Wire Rope	Improved Plow Steel	HDG