

**TECHNICAL DATA SHEET: 0021007**  
**WIND TOWER CABLE SAFE CLIMB SYSTEM**  
**PN: 115-600**



**Application:**


Recommend use with Reinforced Aluminum Ladder

Operating Temp. Range: 140°F (60°C) to -40°F (-40°C)

Corrosion Rating: C4 High per ISO 12944

**APPLICABLE STANDARDS:**

OSHA / ANSI Z359.16 / TIA 222 / EN 353-1:2014+A1:2017 / CSA Z259.2.5 / AS-NZS 1891-3 & 4 / EN 50308

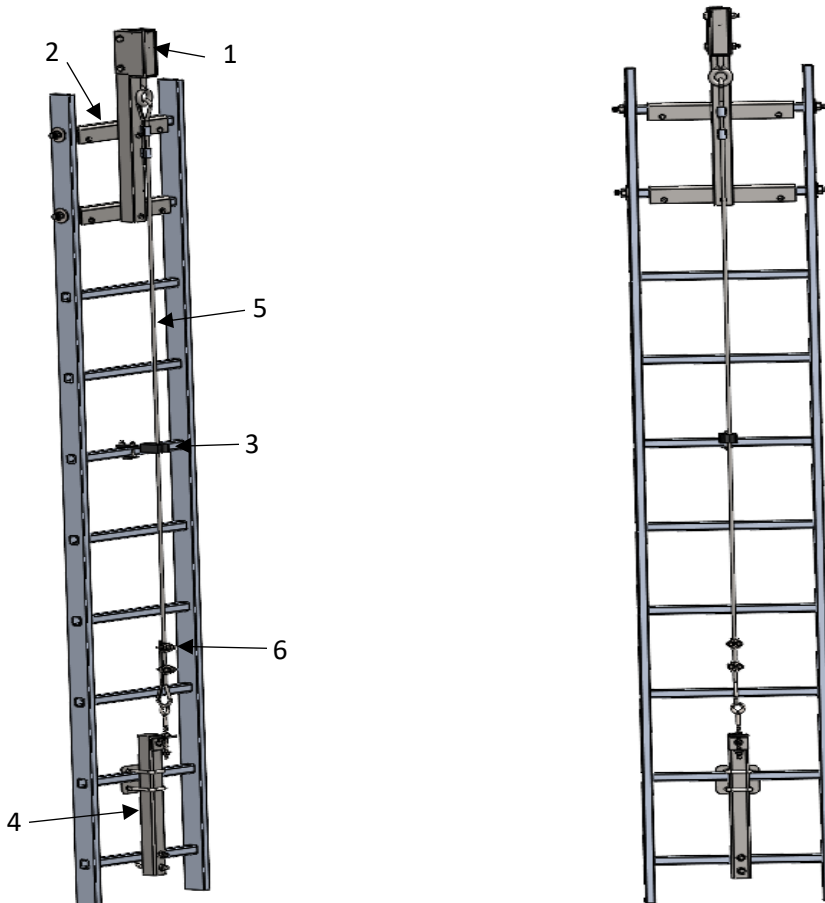

	<b>Component</b>	<b>Material</b>	<b>Finish</b>
1	Head Assembly	Carbon Steel	HDG
2	Double T Bracket	Carbon Steel	HDG
3	Cable Guide	Carbon Steel / Rubber	HDG
4	Bracket Pack (Includes Base Tube and Hardware)	Carbon Steel	HDG
5	3/8" 7x19 Wire Rope	316 Stainless Steel	Natural
6	Cable Clips	316 Stainless Steel	Natural