

TECHNICAL DATA SHEET: 0021009
LADDER MOUNT SAFE CLIMB SYSTEM S.S.



Application:


Recommend use with Solid Rung Steel Ladder or Climb Face Application

Operating Temp. Range: 140°F (60°C) to -40°F (-40°C)

Corrosion Rating: ANSI Z359.16

APPLICABLE STANDARDS:

OSHA / ANSI Z359.16 / TIA 222

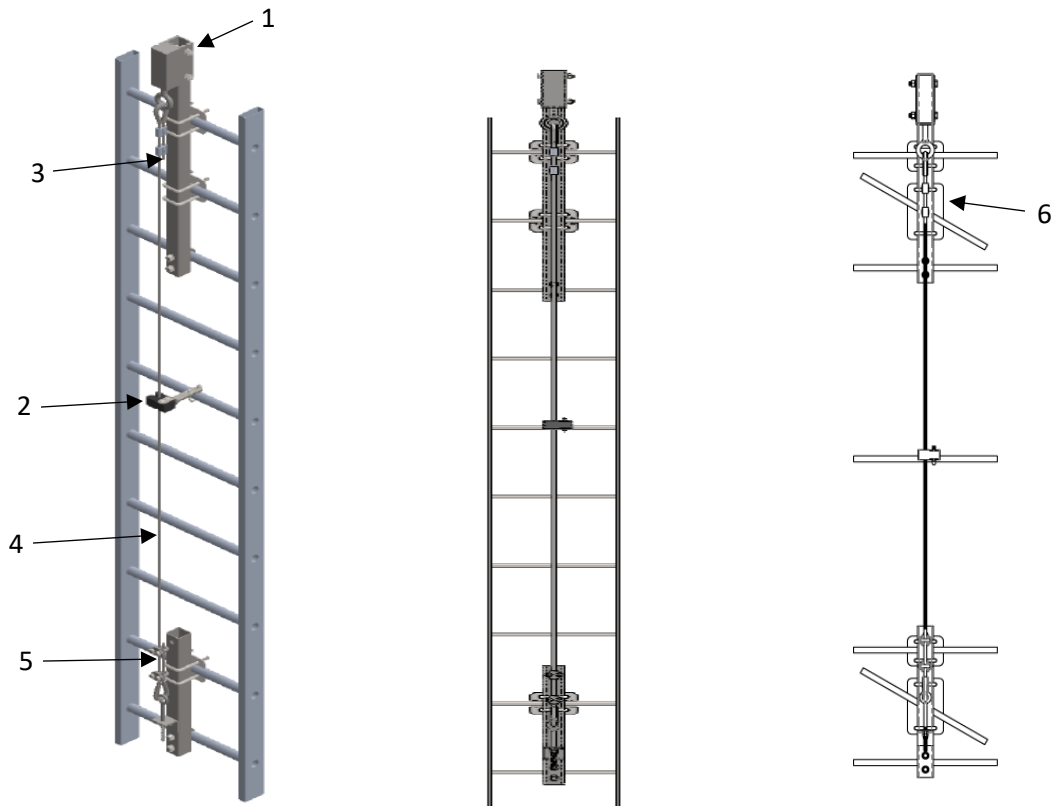

	Component	Material	Finish
1	Head Assembly	316 Stainless Steel	Natural
2	Cable Guide	316 Stainless Steel / Rubber	Natural
3	Bracket Pack (Includes Top & Base Tube and Hardware)	316 Stainless Steel	Natural
4	3/8" 7x19 Wire Rope	316 Stainless Steel	Natural
5	Cable Clips	316 Stainless Steel	Natural
6	Diagonal Clamp Plate (Used with Climb Face Application)	316 Stainless Steel	Natural