

**TECHNICAL DATA SHEET: 00210012**  
**LIGHT WEIGHT TOWER SAFE CLIMB SYSTEM HDG**



**Application:**


Recommend use with Light Weight Tower Application

Operating Temp. Range: 140°F (60°C) to -40°F (-40°C)

Corrosion Rating: ANSI Z359.16

**APPLICABLE STANDARDS:**

OSHA / ANSI Z359.16 / TIA 222

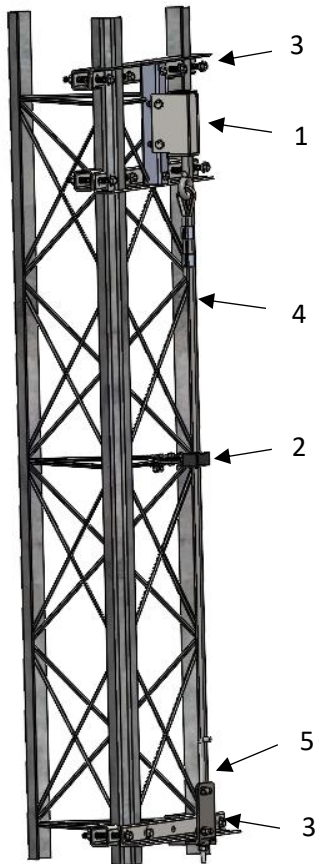

	<b>Component</b>	<b>Material</b>	<b>Finish</b>
1	Head Assembly	Carbon Steel	HDG
2	Cable Guide	Carbon Steel / Rubber	HDG
3	Bracket Pack (Includes Mounting Brackets & Hardware)	Carbon Steel	HDG
4	3/8" 7x19 Wire Rope	Carbon Steel	HDG
5	Cable Clips	Carbon Steel	HDG