

**TECHNICAL DATA SHEET: 0021007**  
**WIND TOWER CABLE SAFE CLIMB SYSTEM**  
**PN: 115-600**



**Application:**


Recommend use with Reinforced Aluminum Ladder

Operating Temp. Range: 140°F (60°C) to -40°F (-40°C)

Corrosion Rating: C4 High per ISO 12944

**APPLICABLE STANDARDS:**

OSHA / ANSI Z359.16 / TIA 222 / EN 353-1:2014+A1:2017 / CSA Z259.2.5 / AS-NZS 1891-3 & 4 / EN 50308

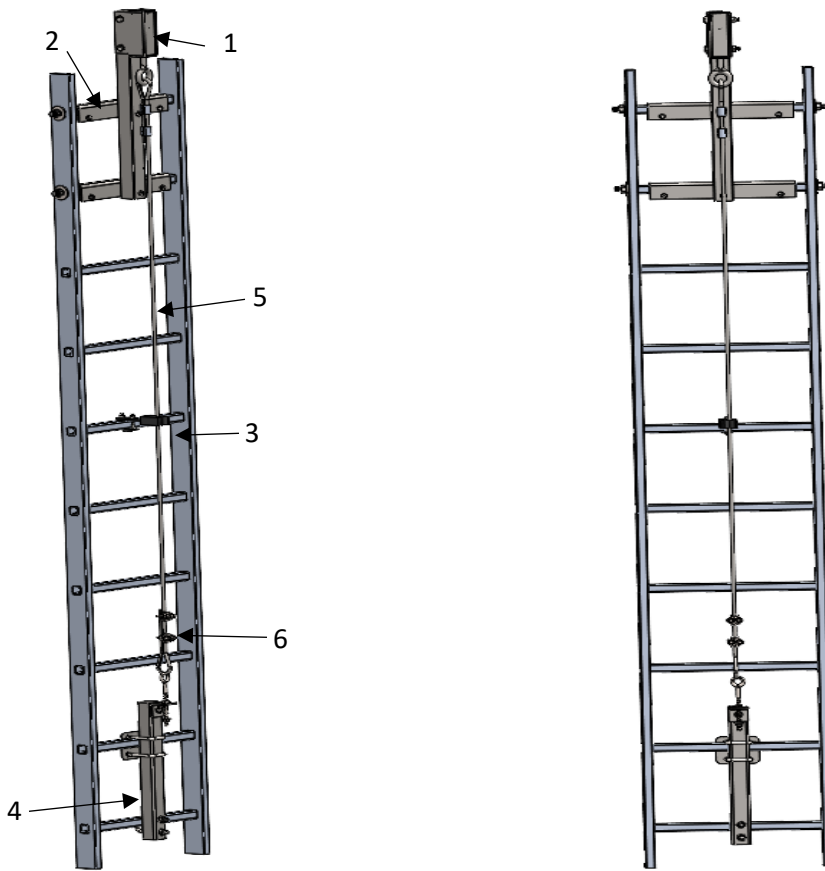

|   | <b>Component</b>                               | <b>Material</b>          | <b>Finish</b>                      |
|---|--|--------------------------|------------------------------------|
| 1 | Head Assembly                                  | Carbon Steel             | Sherwin C4 High Paint System       |
| 2 | Double T Bracket                               | Carbon Steel             | Sherwin C4 High Paint System       |
| 3 | Cable Guide                                    | Stainless Steel / Rubber | Natural                            |
| 4 | Bracket Pack (Includes Base Tube and Hardware) | Carbon Steel             | HDG / Sherwin C4 High Paint System |
| 5 | 3/8" 7x19 Wire Rope                            | 316 Stainless Steel      | Natural                            |
| 6 | Cable Clips                                    | 316 Stainless Steel      | Natural                            |